



Lotus
LED
Lights

LIGHTING YOUR FUTURE



PRODUCT CATALOG

www.lotusledlights.com



TABLE OF CONTENTS

- REGRESSED FIXTURES.....3-8
- DEEP REGRESSED FIXTURES..... 9-10
- ADJUSTABLE GIMBALS11-14
- TRIMLESS FIXTURES 15
- INDIRECT RECESSED 16
- FLOATING GIMBALS17-18
- SLOPPED CEILING FIXTURES19-20
- LED PANELS 21-24
- FIRE RATED FIXTURES**..... 25-26
- COMMERCIAL RECESSED27-28
- PUCKS 29
- STEP LIGHTS 30
- SURFACE / J-BOX MOUNT 31-32
- LED BARS 33
- LED STRIPS 34
- 12-24V DRIVERS 35-36
- DIMMERS, WALL SCONCE & DOORBELL.....37
- ACCESSORIES 38





2" REGRESSED



- Model #: LED-1-S7W-5CCT
- Size: 2"
- Trims: White & Black, Round & Square



- Model #: LED-2-S15W
- Size: 2"
- Trims: 85 Combinations In Stock



- Model #: LED-1-S6W
- Size: 2"
- Trims: White & Black, Round & Square



- Model #: JXL-COB02
- Size: 2"
- Trims: White & Black, Smooth & Baffle

85 Combinations of Trims & Reflectors In Stock



- Model #: LED-2-S8W2
- Size: 2"
- Trims: 85 Combinations In Stock

Model:	LED-1-S6W	LED-1-S7W-5CCT	JXL-COB02
Short Description:	2" Round / Square 24 V AC/DC	2" Round / Square 7W 5CCT	2" Round / Square Economy 3CCT
Power (W):	6 W	7 W	8 W
Warm 2700 K (lm):		430	
Soft 3000 K (lm):	480	460	620 / 520
Bright 3500 K (lm):		480	
Neutral 4000 K (lm):		480	670 / 570
Daylight 5000 K (lm):		450	650 / 550
Dim to Warm:			
User Selectable CCT:		5 CCT	3 CCT 30-40-50
Input Voltage:	24 V AC / DC	120 V AC	
Dimmable Triac:		Yes	
Dimmable 0-10V:		No	
Color Rendering Index CRI:		90+	
Beam Angle:		38°	36°
Rated Life (LM70 Hours):		50,000	30,000
Warranty (Years):		3 Year	
Certifications:	ETL	ETL ES	
Fixture IP Grade:		Damp	
Cut Out:	2"	2 1/8"	2 3/4"
Dimensions (Outside):	2 1/4"	2 3/8"	3 1/8"

Model:	LED-2-S15W	LED-2-S8W2
Short Description:	2" Round / Square Designer Series High Output	2" Round / Square Designer Series
Power (W):	15 W	8 W
Warm 2700 K (lm):	980	580
Soft 3000 K (lm):	1000	600
Bright 3500 K (lm):	960	
Neutral 4000 K (lm):	1020	620
Daylight 5000 K (lm):	960	
Dim to Warm:	800	
User Selectable CCT:	5 CCT	
Input Voltage:	120V AC Triac Dim / 120-277V AC 0-10V Dim	120 V AC
Dimmable Triac:		Yes
Dimmable 0-10V:	Yes	No
Color Rendering Index CRI:		90+
Beam Angle:		38° / 24°
Rated Life (LM70 Hours):		50,000
Warranty (Years):		5 Year
Certifications:		ETL ES
Fixture IP Grade:	Wet	Damp
Cut Out:		2 3/4"
Dimensions (Outside):		3 1/8"

3" REGRESSED



● Model #: LED-3-S6W-5CCT-BA
● Size: 3"
● Trims: White, Round



● Model #: LL3R
● Size: 3"
● Trims: White & Black, Round



● Model #: LD3R
● Size: 3"
● Trims: White & Black, Round



● Model #: LD3S
● Size: 3"
● Trims: White & Black, Square

Model:	LED-3-S6W-5CCT-BA	LL3R
Short Description:	3" Round Regressed Baffle LED 6W 5CCT	3" Round Slim Recessed LED 11W
Power (W):	6 W	11 W
Warm 2700 K (lm):	420	780
Soft 3000 K (lm):	430	850
Bright 3500 K (lm):	460	920
Neutral 4000 K (lm):	480	940
Daylight 5000 K (lm):	450	930
Dim to Warm:		900
User Selectable CCT:	5CCT : 2700-3000-3500-4000-5000K	
Input Voltage:	120V AC	120V-347V AC
Dimmable Triac:		Yes
Dimmable 0-10V:	No	Yes
Color Rendering Index CRI:		90+
Beam Angle:	110°	38°
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	3 Year	10 Year Res./ 5 Year Com.
Certifications:	cETLus, ES	cULus
Fixture IP Grade:	Damp	Wet
Cut Out:	3 1/4"	3"
Dimensions (Outside):	3 3/4"	3 1/2"

Model:	LD3R	LD3S
Short Description:	3" Round Regressed LED 15W	3" Square Regressed LED 15W
Power (W):	15 W	
Warm 2700 K (lm):	1230	
Soft 3000 K (lm):	1290	
Bright 3500 K (lm):	1350	
Neutral 4000 K (lm):	1410	
Daylight 5000 K (lm):	1450	
Dim to Warm:	1300	
User Selectable CCT:	2700-3000-3500-4000-5000K	
Input Voltage:	120V-347V AC	
Dimmable Triac:	Yes	
Dimmable 0-10V:	Yes	
Color Rendering Index CRI:	90+	
Beam Angle:	38°	
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	10 Year Residential / 5 Year Commercial	
Certifications:	cULus	
Fixture IP Grade:	Wet	
Cut Out:	3 1/2"	
Dimensions (Outside):	4 1/4"	

4" - 6" REGRESSED



- Model #: AD-LED-4-S15W
- Size: 4"
- Trims: Round & Square, White & Black



- Model #: JXL-COB04
- Size: 4"
- Trims: White & Black, Smooth & Baffle




- Model #: LL4RR
- Size: 4"
- Trims: White & Black



- Model #: LL4SR
- Size: 4"
- Trims: White & Black



- Model #: LL6RR
- Size: 6"
- Trims: White & Black

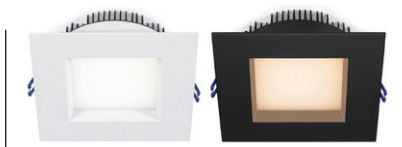

- Model #: LL6SR
- Size: 6"
- Trims: White & Black


Model:	AD-LED-4-S15W	LL4RR	LL4SR
Short Description:	4" Round / Square Regressed 3K, 4K, 5CCT	4" Round Regressed Plenum	4" Square Regressed Plenum
Power (W):	15 W	14.5 W	
Warm 2700 K (lm):	910	950	
Soft 3000 K (lm):	960	1000	
Bright 3500 K (lm):	1015		
Neutral 4000 K (lm):	1050	1020	
Daylight 5000 K (lm):	1055		
Dim to Warm:		850	780
User Selectable CCT:	5 CCT		
Input Voltage:	120-277 V AC	120-347 V	
Dimmable Triac:		Yes	
Dimmable 0-10V:		Yes	
Color Rendering Index CRI:		90+	
Beam Angle:	40°	90°	
Rated Life (LM70 Hours):	50,000	50,000	
Warranty (Years):	5 Year	10 Res. 5 Com.	
Certifications:	ETL ES	UL ES T24	
Fixture IP Grade:	Damp	Wet IP54	
Cut Out:	3 3/4"	4 1/4"	
Dimensions (Outside):	4 1/2"	5"	

Model:	JXL-COB04	LL6RR	LL6SR
Short Description:	4" Round / Square Economy 3CCT	6" Round Regressed Plenum	6" Square Regressed Plenum
Power (W):	15 W	17 W	18 W
Warm 2700 K (lm):		1150	
Soft 3000 K (lm):	1230/1170	1200	
Bright 3500 K (lm):			
Neutral 4000 K (lm):	1410/1360	1300	
Daylight 5000 K (lm):	1390/1290		
Dim to Warm:			
User Selectable CCT:	3 CCT 30-40-50		
Input Voltage:	120 V AC	120-347 V AC	
Dimmable Triac:		Yes	
Dimmable 0-10V:	No	Yes	
Color Rendering Index CRI:		90+	
Beam Angle:	36°	90°	
Rated Life (LM70 Hours):	30,000	50,000	
Warranty (Years):	3 Year	10 Res. 5 Com.	
Certifications:	ETL ES	UL ES T24	
Fixture IP Grade:	Damp	Wet IP54	
Cut Out:	4 1/2"	6 1/4"	
Dimensions (Outside):	4 3/4"	7"	

4" - 6" - 8" DEEP REGRESSED




● Model #: LD4S | LD4S-HO
● Size: 4"
● Trims: As Shown

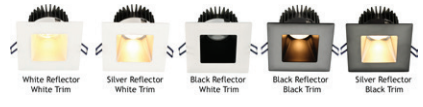


● Model #: LD4R-CPL | LD4S-CPL
● Size: 4"
● Trims: White, Round & Square




● Model #: LD4R | LD4R-HO
● Size: 4"
● Trims: As Shown

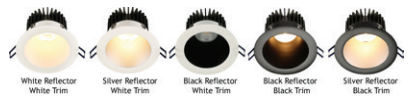

● Model #: LD6R | LD6R-HO
● Size: 6"
● Trims: As Shown

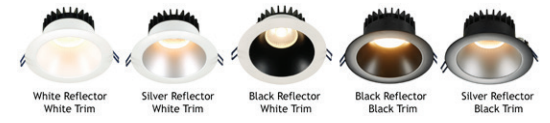

● Model #: LD8R | LD8R-HO
● Size: 8"
● Trims: As Shown

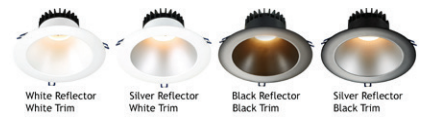

Model:	LD4R LD4R-HO	LD4S LD4S-HO	LD4R-CPL LD4S-CPL
Short Description:	4" Round Deep Regressed	4" Square Deep Regressed	4" Round & Square Polycarbonate Ocean Front
Power (W):	15 / 18 W		
Warm 2700 K (lm):	1100 / 1500		
Soft 3000 K (lm):	1200 / 1550		
Bright 3500 K (lm):	1250 / 1600		
Neutral 4000 K (lm):	1300 / 1650		
Daylight 5000 K (lm):	1400 / 1700		
Dim to Warm:	3000-2000K : 900 / 1150 3000-1800K : 980 / 1250		
User Selectable CCT:	5 CCT 2700-3000-3500-4000-5000		
Input Voltage:	120 V - 347 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	Yes		
Color Rendering Index CRI:	90+		
Beam Angle:	30°		
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	10 Year Residential / 5 Year Commercial		
Certifications:	UL ES (Except Dim to Warm & 5CCT) T24		
Fixture IP Grade:	Wet Location IP54		
Cut Out:	4 1/2"		
Dimensions (Outside):	4 7/8"		

Model:	LD6R LD6R-HO	LD8R LD8R-HO
Short Description:	6" Round Deep Regressed	8" Round Deep Regressed
Power (W):	18 / 30 W	
Warm 2700 K (lm):	1500 / 2630	
Soft 3000 K (lm):	1550 / 2700	
Bright 3500 K (lm):	1600 / 2810	
Neutral 4000 K (lm):	1650 / 2900	
Daylight 5000 K (lm):	1700 / 3000	
Dim to Warm:	1150 - 18W only	
User Selectable CCT:	5 CCT - 18W only	
Input Voltage:	120 V - 347 V AC	
Dimmable Triac:	Yes	
Dimmable 0-10V:	Yes	
Color Rendering Index CRI:	90+	
Beam Angle:	38°	
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	10 Year Residential / 5 Year Commercial	
Certifications:	UL ES (Except Dim to Warm & 5CCT) T24	
Fixture IP Grade:	Wet Location IP54	
Cut Out:	6 1/4"	8"
Dimensions (Outside):	6 3/4"	9"



2" - 3" ADJUSTABLE GIMBAL ORIGINAL LINE



- Model #: LRG2 | LRG2-HO
- Size: 2"
- Trims: Black, White & Oil Rubbed Bronze



- Model #: LL2G | LL2G-HO
- Size: 2"
- Trims: Black, White, Nickel



- Model #: LSG2 | LSG2-HO
- Size: 2"
- Trims: Black, White & Oil Rubbed Bronze

Model:	LL2G LL2G-HO	LRG2 LRG2-HO	LSG2 LSG2-HO
Short Description:	2" Round Eyeball Gimbal	2" Round Regressed Gimbal	2" Square Regressed Gimbal
Power (W):		5 W / 5.5 W	
Warm 2700 K (lm):		380 / 450	
Soft 3000 K (lm):		400 / 490	
Bright 3500 K (lm):		N/A / 500	
Neutral 4000 K (lm):		430 / 530	
Daylight 5000 K (lm):		N/A / 550	
Dim to Warm:		N/A / 430	
User Selectable CCT:			
Input Voltage:		120 V - 347 V AC	
Dimmable Triac:		Yes	
Dimmable 0-10V:		Yes	
Color Rendering Index CRI:		90+	
Beam Angle:		36°	
Rated Life (LM70 Hours):		50,000	
Warranty (Years):		10 Year Residential / 5 Year Commercial	
Certifications:		UL ES (Except Dim to Warm & 5CCT) T24	
Fixture IP Grade:		Wet Location IP54	
Cut Out:	2 1/8"		2 3/4"
Dimensions (Outside):	2 1/2"		3"



- Model #: LL3G | LL3G-HO
- Size: 3"
- Trims: Trims: Black, White, Nickel



- Model #: LRG3 | LRG3-HO
- Size: 3"
- Trims: Black, White & Oil Rubbed Bronze



- Model #: LSG3 | LSG3-HO
- Size: 3"
- Trims: Black, White & Oil Rubbed Bronze

Model:	LL3G LL3G-HO	LRG3 LRG3-HO	LSG3 LSG3-HO
Short Description:	3" Round Eyeball Gimbal	3" Round Regressed Gimbal	3" Square Regressed Gimbal
Power (W):		7.5 W / 11 W	
Warm 2700 K (lm):		580 / 920	
Soft 3000 K (lm):		560 / 990	
Bright 3500 K (lm):		620 / 1060	
Neutral 4000 K (lm):		630 / 1080	
Daylight 5000 K (lm):		650 / 1090	
Dim to Warm:		500 / 780	
User Selectable CCT:		5 CCT 2700-3000-3500-4000-5000	
Input Voltage:		120 V - 347 V AC	
Dimmable Triac:		Yes	
Dimmable 0-10V:		Yes	
Color Rendering Index CRI:		90+	
Beam Angle:	38°		38°/15°
Rated Life (LM70 Hours):		50,000	
Warranty (Years):		10 Year Residential / 5 Year Commercial	
Certifications:		UL ES (Except Dim to Warm & 5CCT) T24	
Fixture IP Grade:		Wet Location IP54	
Cut Out:	3"		3 1/2"
Dimensions (Outside):	3 1/4"		4 1/4"



3.5" - 4" ADJUSTABLE VENUS LINE



- Model #: AD-35-S12W-xx-REY
- Size: 3.5"
- Trims: As Shown



- Model #: AD-LED-4-S12W-xx-LREY
- Size: 4"
- Trims: White & Black, Round & Square

Model:	AD-35-S12W-xx-REY	AD-LED-4-S12W-xx-LREY
Short Description:	3.5" Round Venus Gimbal 5CCT or DTW	4" Round / Square Venus Gimbal 3K, DTW, 5CCT
Power (W):	12 W	
Warm 2700 K (lm):	780	
Soft 3000 K (lm):	880 / 820	
Bright 3500 K (lm):	890	
Neutral 4000 K (lm):	920	
Daylight 5000 K (lm):	910	
Dim to Warm:	3000K to 1800K	
User Selectable CCT:	5 CCT 2700 - 3000 - 3500 - 4000 - 5000	
Input Voltage:	120 V AC	
Dimmable Triac:	Yes	
Dimmable 0-10V:	No	
Color Rendering Index CRI:	90+	
Beam Angle:	38°	
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	5 Year	
Certifications:	ETL ES	
Fixture IP Grade:	Wet Location IP54	
Cut Out:	3 3/4"	4 1/2"
Dimensions (Outside):	4 3/8"	5"

4" - 6" ADJUSTABLE GIMBAL ORIGINAL LINE



- Model #: LL4G | LL4G-HO
- Size: 4"
- Trims: Black, White & Nickel



- Model #: LRG4 | LRG4-HO
- Size: 4"
- Trims: Black, White & Oil Rubbed Bronze



- Model #: LRG6 | LRG6-HO
- Size: 6"
- Trims: Black, White & Oil Rubbed Bronze

Model:	LL4G LL4G-HO	LRG4 LRG4-HO	LRG6 LRG6-HO
Short Description:	4" Round Eyeball Gimbal	4" Round Regressed Gimbal	6" Round Regressed Gimbal
Power (W):	11.4 / 15 W		15 / 18 W
Warm 2700 K (lm):	960 / 1100		1100 / 1500
Soft 3000 K (lm):	1000 / 1200		1200 / 1550
Bright 3500 K (lm):	1020 / 1250		1250 / 1600
Neutral 4000 K (lm):	1050 / 1300		1300 / 1650
Daylight 5000 K (lm):	1100 / 1400		1400 / 1700
Dim to Warm:	3000-2000K : 800 / 900 3000-1800K : 980 / 1250 3000-2000K : 900 / 1150 3000-1800K : 1250 / 1400		
User Selectable CCT:	5 CCT 2700 - 3000 - 3500 - 4000 - 5000		
Input Voltage:	120 V - 347 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	Yes		
Color Rendering Index CRI:	90+		
Beam Angle:	38°		
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	10 Year Residential / 5 Year Commercial		
Certifications:	UL ES (Except Dim to Warm & 5CCT) T24		
Fixture IP Grade:	Wet Location IP54		
Cut Out:	4 1/2"	5"	6"
Dimensions (Outside):	5"	5 3/4"	7 1/2"



2" - 4" TRIMLESS FIXTURES



- Model #: LED-2-S15W-T
- Size: 2"
- Trims: White & Black, Round & Square



- Model #: LED-2-S11W-EY-T
- Size: 2"
- Trims: White & Black, Round & Square



- Model #: LD4R-IT | LD4R-HO-IT
- Size: 4"
- Trims: White, Black & Nickel

Model:	LED-2-S11W-EY-T	LED-2-S15W-T	LD4R-IT LD4R-HO-IT
Short Description:	2" Trimless Round / Square Adjustable Gimbal 11W	2" Trimless Round / Square 15W	4" Round Trimless Deep Regressed
Power (W):	11 W	15 W	15 / 18 W
Warm 2700 K (lm):	800	820	1100 / 1500
Soft 3000 K (lm):	850	870	1200 / 1550
Bright 3500 K (lm):	930	950	1250 / 1600
Neutral 4000 K (lm):	980	985	1300 / 1650
Daylight 5000 K (lm):	1000	960	1400 / 1700
Dim to Warm:	900	800	900 / 1150
User Selectable CCT:	5 CCT 2700 - 3000 - 3500 - 4000 - 5000		
Input Voltage:	120 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	No		Yes
Color Rendering Index CRI:	90+		
Beam Angle:	24° / 38°		30°
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	5 Year		10 Year Res / 5 Com
Certifications:	ETL	ETL ES	UL ES T24
Fixture IP Grade:	Wet Location IP54		
Cut Out:	2 5/8" Round/Square Hole	2 5/8" Square Hole	4 1/2"
Dimensions (Outside):	2 1/2" Round/Square	2 1/2" Square	Trimless 4 1/2"

4" - 6" INDIRECT RECESSED



- Model #: DS-LED-4-S12W-5CCT
- Size: 4"
- Trims: White



- Model #: DS-LED-4-S12W-5CCT-SQ
- Size: 4"
- Trims: White



- Model #: DS-LED-6-S15W-5CCT
- Size: 6"
- Trims: White



Model:	DS-LED-4-S12W-5CCT	DS-LED-4-S12W-5CCT-SQ	DS-LED-6-S15W-5CCT
Short Description:	4" Round Indirect Slim Recessed	4" Square Indirect Slim Recessed	6" Round Indirect Slim Recessed
Power (W):	12 W		15 W
Warm 2700 K (lm):	710	660	980
Soft 3000 K (lm):	750	690	995
Bright 3500 K (lm):	780	730	1045
Neutral 4000 K (lm):	770	730	1050
Daylight 5000 K (lm):	740	700	1020
Dim to Warm:			
User Selectable CCT:	5 CCT 2700-3000-3500-4000-5000		
Input Voltage:	120 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	No		
Color Rendering Index CRI:	90+		
Beam Angle:	130°		140°
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	3 Years		
Certifications:	c ETL us		
Fixture IP Grade:	Damp		
Cut Out:	4 1/4" Round Hole	4 1/4" Square Hole	5"
Dimensions (Outside):	4 3/4" Round	4 3/4" Square	5 3/4"




2" - 3" - 4" - 6" FLOATING GIMBALS



NEW
Smart
Wi-Fi &
Adjustable

- Model #: ADS4FGSTRGBCW
- Size: 4"
- Trims: White & Black

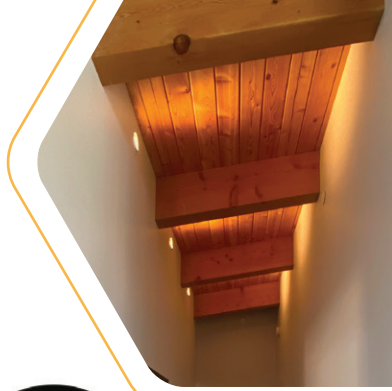

- Model #: LED-2-S5W-5CCT-FG
- Size: 2"
- Trims: White & Black



- Model #: LED-3-S7W-FG
- Size: 3"
- Trims: White & Black



- Model #: LED-4-S9W-FG
- Size: 4"
- Trims: White & Black



- Model #: LED-6-S15W-FG
- Size: 6"
- Trims: White & Black

Model:	LED-2-S5W-5CCT-FG	LED-3-S7W-FG
Short Description:	2" LED Floating Gimbal	3" LED Floating Gimbal 3K or 5CCT
Power (W):	5 W	7 W
Warm 2700 K (lm):	370	550
Soft 3000 K (lm):	380	580
Bright 3500 K (lm):	410	630
Neutral 4000 K (lm):	420	630
Daylight 5000 K (lm):	410	640
Dim to Warm:		3000-1800K 465
User Selectable CCT:	5 CCT 2700 - 3000 - 3500 - 4000 - 5000	
Input Voltage:	120V AC	
Dimmable Triac:	Yes	
Dimmable 0-10V:	No	
Color Rendering Index CRI:	90+	
Beam Angle:	38°	
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	3 Year	
Certifications:	cETLus	
Fixture IP Grade:	Damp	
Cut Out:	2 3/4"	3 3/4"
Dimensions (Outside):	3 1/2"	4 1/4"

Model:	ADS4FGSTRGBCW	LED-4-S9W-FG	LED-6-S15W-FG
Short Description:	4" Round Floating Gimbal RGB + Tuneable White	4" Round Floating Gimbal 3K or 5CCT	6" Round Floating Gimbal 3K or 5CCT
Power (W):	7W	9 W	15 W
Warm 2700 K (lm):		740	1180
Soft 3000 K (lm):	Infinite Light Colors	790 / 770	1520 / 1220
Bright 3500 K (lm):		820	1270
Neutral 4000 K (lm):		850	1270
Daylight 5000 K (lm):		855	1180
Dim to Warm:		650	
User Selectable CCT:		5 CCT 2700 - 3000 - 3500 - 4000 - 5000	5 CCT 2700 - 3000 - 3500 - 4000 - 5000
Input Voltage:	120 V AC		120V-277 V AC
Dimmable Triac:	Yes	Dimmable by app only	
Dimmable 0-10V:	No		
Color Rendering Index CRI:	90+		
Beam Angle:	38°		
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	3 Year		
Certifications:	cETLus ES	cETLus	cETLus ES
Fixture IP Grade:	Damp		
Cut Out:	4 1/2"		6"
Dimensions (Outside):	4 7/8"		6 7/8"


4" - 5" - 6" SLOPED CEILING FIXTURES



● Model #: LD3R-4RSL
● Size: 4"
● Trims: Black & White



● Model #: LRG3-4RSL | LRG3-HO-4RSL
● Size: 4"
● Trims: Black, White & Oil Rubbed Bronze

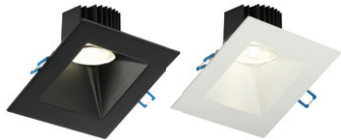

● Model #: LD3S-5SSL
● Size: 5"
● Trims: Black & White



● Model #: LSG3-5SSL | LSG3-HO-5SSL
● Size: 5"
● Trims: Black, White & Oil Rubbed Bronze

Model:	LD3R-4RSL	LD3S-5SSL	LRG3-4RSL	LSG3-5SSL
Short Description:	4" Round 30° Sloped Regressed	5" Square 30° Sloped Regressed	4" Round Sloped 30° Gimbal for 5° to 55° Slopes	5" Square Sloped 30° Gimbal for 5° to 55° Slopes
Power (W):	15W		7.5 W / 11 W	
Warm 2700 K (lm):	1220		580 / 920	
Soft 3000 K (lm):	1260	1270	560 / 990	
Bright 3500 K (lm):	1330	1350	620 / 1060	
Neutral 4000 K (lm):	1380	1380	630 / 1080	
Daylight 5000 K (lm):	1390	1400	650 / 1090	
Dim to Warm:	1280	1300	500 / 780	
User Selectable CCT:	5 CCT 2700-3000-3500-4000-5000			
Input Voltage:	120 V - 347 V AC			
Dimmable Triac:	Yes			
Dimmable 0-10V:	Yes			
Color Rendering Index CRI:	90+			
Beam Angle:	38°			
Rated Life (LM70 Hours):	50,000			
Warranty (Years):	10 Year Residential / 5 Year Commercial			
Certifications:	cULus	UL ES (Except Dim to Warm & 5CCT)		
Fixture IP Grade:	Wet Location IP54			
Cut Out:	4 1/2"-5"	5"		
Dimensions (Outside):	5 3/4"	5 1/4"	5 3/4"	



● Model #: LD4R-5R-SL30 | LD4R-HO-5R-SL30
● Size: 5"
● Trims: Black, White & Oil Rubbed Bronze



● Model #: LRG6-6RSL | LRG6-HO-6RSL
● Size: 6"
● Trims: Black, White & Oil Rubbed Bronze

Model:	LD4R-5R-SL30 LD4R-HO-5R-SL30	LRG6-6RSL LRG6-HO-6RSL
Short Description:	5" Round 30° Sloped Deep Regressed	6" Round 30° Sloped Gimbal for 10° to 50° Slopes
Power (W):	15 W / 18 W	
Warm 2700 K (lm):	1100 / 1500	
Soft 3000 K (lm):	1200 / 1550	
Bright 3500 K (lm):	1250 / 1600	
Neutral 4000 K (lm):	1300 / 1650	
Daylight 5000 K (lm):	1400 / 1700	
Dim to Warm:	3000K to 2000K and 3000K to 1800K	
User Selectable CCT:	5 CCT 2700-3000-3500-4000-5000	
Input Voltage:	120 V - 347 V AC	
Dimmable Triac:	Yes	
Dimmable 0-10V:	Yes	
Color Rendering Index CRI:	90+	
Beam Angle:	30°	38°
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	10 Year Residential / 5 Year Commercial	
Certifications:	UL ES (Except Dim to Warm & 5CCT) T24	
Fixture IP Grade:	Wet Location IP54	
Cut Out:	5 1/2"	6 1/4"
Dimensions (Outside):	6 1/4"	7"

4" LED PANELS



- Model #: LL4R
- Size: 4"
- Trims: White, Black, Copper & Nickel



- Model #: LED-S9W-5CCTWH-R-BF
- Size: 4"
- Trims: White



- Model #: LED-S9W
- Size: 4"
- Trims: White & Black
- *Also available in 6 pack*



- Model #: LED-S9W-5CCTWH-SQ
- Size: 4"
- Trims: White



Contractor
6 Pack
Option



- Model #: LB4R
- Size: 4"
- Trims: White & Black



- Model #: LL4S
- Size: 4"
- Trims: White & Black

Model:	LB4R	LL4R	LL4S
Short Description:	4" Round Super Thin Economy	4" Round Super Thin Ultimate	4" Square Super Thin Ultimate
Power (W):	11 W	13.5 W	13.5 W
Warm 2700 K (lm):		750	2700K - 800
Soft 3000 K (lm):	700	760	3000K - 850
Bright 3500 K (lm):			
Neutral 4000 K (lm):	730	800	4000K - 950
Daylight 5000 K (lm):		850	
Dim to Warm:	30K-20K	28-20K 35-20K	
User Selectable CCT:			
Input Voltage:	120V - 347V AC or 24V DC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	Yes		
Color Rendering Index CRI:	80	90	80
Beam Angle:	110°		
Rated Life (LM70 Hours):	36,000	50,000	
Warranty (Years):	10 Year Residential / 5 Year Commercial		
Certifications:	UL ES (Except Dim to Warm & 5CCT) T24		
Fixture IP Grade:	Wet Location IP54Wet		
Cut Out:	4 1/4"		
Dimensions (Outside):	4 7/8"	5 1/4"	4 3/4"

Model:	LED-S9W-5CCTWH-R-BF	LED-S9W	LED-S9W-5CCTWH-SQ
Short Description:	4" Round Regressed Baffle 5CCT	4" Round Budget 3K, 4K or 5CCT	4" Square Budget 5CCT
Power (W):	9 W		
Warm 2700 K (lm):	685	600	650
Soft 3000 K (lm):	720	600	700
Bright 3500 K (lm):	770	620	735
Neutral 4000 K (lm):	780	620	740
Daylight 5000 K (lm):	760	620	710
Dim to Warm:			
User Selectable CCT:	5 CCT		
Input Voltage:	120 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	No		
Color Rendering Index CRI:	80		
Beam Angle:	110°		
Rated Life (LM70 Hours):	36,000		
Warranty (Years):	3 Year		
Certifications:	ETL ES		
Fixture IP Grade:	Damp		
Cut Out:	4 1/4"		
Dimensions (Outside):	5"	4 7/8"	

6" LED PANELS



- Model #: LL6R
- Size: 6"
- Trims: White, Black, Copper & Nickel



- Model #: LED-6-S12W-5CCTWH-R-BF
- Size: 6"
- Trims: White



- Model #: LED-6-S12W-5CCTWH-SQ
- Size: 6"
- Trims: White



- Model #: LB6R
- Size: 6"
- Trims: White & Black



- Model #: LL6S
- Size: 6"
- Trims: White & Black



- Model #: LED-6-S12W
- Size: 6"
- Trims: White
- *Also available in 6 pack*



**Contractor
6 Pack
Option**

Model:	LB6R	LL6R	LL6S
Short Description:	6" Round Super Thin Economy	6" Round Super Thin Ultimate	6" Square Super Thin Ultimate
Power (W):	14 W	17 W	17 W
Warm 2700 K (lm):		950	1000
Soft 3000 K (lm):	900	980	1050
Bright 3500 K (lm):			
Neutral 4000 K (lm):	930	1000	1100
Daylight 5000 K (lm):		1050	
Dim to Warm:		28-20K 35-20K	
User Selectable CCT:			
Input Voltage:	120 V - 347 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	Yes		
Color Rendering Index CRI:	80	90	80
Beam Angle:	110°		
Rated Life (LM70 Hours):	36,000	50,000	
Warranty (Years):	10 Year Residential / 5 Year Commercial		
Certifications:	UL ES (Except Dim to Warm & 5CCT) T24		
Fixture IP Grade:	Wet Location IP54		
Cut Out:	6 1/4"		
Dimensions (Outside):	6 7/8"	7 1/2"	6 3/4"

Model:	LED-6-S12W-5CCT-R-BF	LED-6-S12W	LED-6-S12W-5CCTWH-SQ
Short Description:	6" Round Regressed Baffle 5CCT	6" Round Budget 3K, 4K or 5CCT	6" Square Budget 5CCT
Power (W):	12 W		
Warm 2700 K (lm):	940	800	890
Soft 3000 K (lm):	990	800	940
Bright 3500 K (lm):	1050	800	1000
Neutral 4000 K (lm):	1070	820	1015
Daylight 5000 K (lm):	1040	800	980
Dim to Warm:			
User Selectable CCT:	5 CCT		
Input Voltage:	120 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	No		
Color Rendering Index CRI:	80		
Beam Angle:	110°		
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	3 Year		
Certifications:	cETLus, Energy Star		
Fixture IP Grade:	Damp		
Cut Out:	6 1/4"		
Dimensions (Outside):	7"	6 7/8"	

4" - 6" FIRE RATED FIXTURES



● Model #: FR-LED-4-S12W-5CCT-PL
● Size: 4"
● Trims: White



● Model #: FR-LED-6-S15W-5CCT-FG
● Size: 6"
● Trims: White



● Model #: FR-LED-6-S15W-5CCT-PL
● Size: 6"
● Trims: White

● Model #: FR-LED-4-S9W-5CCT-FG
● Size: 4"
● Trims: White

Model:	FR-LED-4-S9W-5CCT-FG	FR-LED-4-S12W-5CCT-PL
Short Description:	4" Round Fire Rated Floating Gimbal	4" Round Fire Rated Ultra Slim Recessed LED 5CCT 12W
Power (W):	9 W	12 W
Warm 2700 K (lm):	680	710
Soft 3000 K (lm):	720	770
Bright 3500 K (lm):	775	820
Neutral 4000 K (lm):	800	820
Daylight 5000 K (lm):	800	800
Dim to Warm:		
User Selectable CCT:	2700 - 3000 - 3500 - 4000 - 5000K	
Input Voltage:	120V AC	
Dimmable Triac:	Yes	
Dimmable 0-10V:	No	
Color Rendering Index CRI:	90+	
Beam Angle:	38°	110°
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	3 Years	
Certifications:	cETLus	
Fixture IP Grade:	Insulated Ceiling & Damp Locations	
Cut Out:	4 1/4"	4 1/4"
Dimensions (Outside):	4 7/8"	5"

Model:	FR-LED-6-S15W-5CCT-FG	FR-LED-6-S15W-5CCT-PL
Short Description:	6" Round Fire Rated Floating Gimbal	6" Fire Rated Ultra Slim Panel
Power (W):	15 W	
Warm 2700 K (lm):	1180	960
Soft 3000 K (lm):	1270	1030
Bright 3500 K (lm):	1350	1080
Neutral 4000 K (lm):	1370	1100
Daylight 5000 K (lm):	1350	1050
Dim to Warm:		
User Selectable CCT:	2700 - 3000 - 3500 - 4000 - 5000K	
Input Voltage:	120V AC	
Dimmable Triac:	Yes	
Dimmable 0-10V:	No	
Color Rendering Index CRI:	90+	
Beam Angle:	38°	110°
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	3 Years	
Certifications:	cETLus	
Fixture IP Grade:	Insulated Ceiling & Damp Locations	
Cut Out:	5 1/2" - 6"	6 1/4"
Dimensions (Outside):	6 7/8"	



4" - 6" - 8" - 10" COMMERCIAL RECESSED

Model #: TP120-347-RT4-C-DIM-G1-ES
Size: 4"

Model #: TP120-347-RT6-C-DIM-G1-ES
Size: 6"

Model #: TP120-347-RT8-C-DIM-G1-ES
Size: 8"

Model #: TP120-347-RT9.5-C-DIM-G1-ES
Size: 10"

Trims For All Models: White, Black & Silver Trims with White & Silver Reflector



Model #: LB8R
Size: 8"
Trims: White & Black



Model #: LY82RCD
Size: 8"
Trims: White & Black



Model #: LL10R
Size: 10"
Trims: White & Black



Model #: LL8R
Size: 8"
Trims: White & Black

Model:	TP120-347-RTX-C-DIM-G1-ES			
Short Description:	Round 3 CCT 3 Wattage Selectable			
Size	4"	6"	8"	10"
Power (W):	5.5/8/12 W	7/10/18 W	10/15/22 W	20/25/32 W
Warm 2700 K (lm):				
Soft 3000 K (lm):	500 lm at 5.5W	700 lm at 7W	1000 lm at 10W	2000 lm at 20W
Bright 3500 K (lm):	700 lm at 8W	1000 lm at 10W	1500 lm at 15W	2500 lm at 25W
Neutral 4000 K (lm):	1000 lm at 12W	1500 lm at 18W	2000 lm at 22W	3000 lm at 32W
Daylight 5000 K (lm):				
Dim to Warm:				
User Selectable CCT:	3 CCT - 30-35-40			
Input Voltage:	120V - 347V AC 0-10V Dimmable			
Dimmable Triac:	No			
Dimmable 0-10V:	Yes			
Color Rendering Index CRI:	90+			
Beam Angle:	83°	88°	90°	92°
Rated Life (LM70 Hours):	50,000			
Warranty (Years):	5 Year			
Certifications:	UL, ES			
Fixture IP Grade:	Wet IP54			
Cut Out:	5 1/4"	7 1/2"	9 1/2"	10 1/2"
Dimensions (Outside):	5 15/16"	8 1/4"	10 1/4"	11 1/2"

Model:	LB8R	LY82RCD	LL8R	LL10R
Short Description:	8" Round Budget Super Thin	8" Round Slim	8" Round Recessed High Output	10" Round Recessed High Output
Power (W):	18 W	33 W	40 W	50 W
Warm 2700 K (lm):				
Soft 3000 K (lm):	1200	2200	4500	6500
Bright 3500 K (lm):				
Neutral 4000 K (lm):	1260	2400	4700	6700
Daylight 5000 K (lm):				
Dim to Warm:				
User Selectable CCT:				
Input Voltage:	120 V - 347 V AC			
Dimmable Triac:	Yes		No	
Dimmable 0-10V:	Yes			
Color Rendering Index CRI:	80			
Beam Angle:	110°		45°	60°
Rated Life (LM70 Hours):	36,000	50,000		
Warranty (Years):	5 Year	10 Res. 5 Com.	5 Year	
Certifications:	cULus Energy Star		UL	
Fixture IP Grade:	Wet IP54		Wet Location IP65	
Cut Out:	8"		8 1/2"	11"
Dimensions (Outside):	9"		9 1/2"	12"





PUCKS



- Model #: AD-107T
- Size: 3"
- Trims: White, Black and Nickel
all 3 included in package
Available in single or 3 pack



- Model #: AD-108
- Size: 1"
- Trims: White & Black
Available in 5 pack without connectors,
or in 6 pack with connectors, 6 port
hub and plug-in driver



Model:	AD-108	AD-107T
Short Description:	Mini Puck Light 1" 12V	Puck Light 3" 12V / 24V
Power (W):	1 W	2.2 W
Warm 2700 K (lm):		
Soft 3000 K (lm):	70	150
Bright 3500 K (lm):		
Neutral 4000 K (lm):		170
Daylight 5000 K (lm):		
Dim to Warm:		
User Selectable CCT:		
Input Voltage:	12 V DC	12V / 24V DC
Triac Dimmable:		Yes
0-10V Dimmable:	No	Yes
Color Rendering Index CRI:		90+
Beam Angle:		100°
Rated Life (LM70 Hours):		50,000
Warranty (Years):		3 Year
Certifications:		ETL
Approved Location:		Damp
Dimensions:	1 5/16"	3"
Thickness:	5/8"	1/8"

STEP LIGHTS

- Model #: LSD | LSD09
- Size: 4.5"
- Trims: White & Black



- Model #: LSD03
- Size: 4.5"
- Trims: White & Black

- Model #: LSD04
- Size: 4.5"
- Trims: White & Black



Model:	LSD LSD09	LSD03	LSD04
Short Description:	Step Light Horizontal or Vertical Installation 3K, 4K, 5CCT & Dim to Warm	Step Light Horizontal With Motion Sensor and Photocell	Step Light Vertical With Motion Sensor and Photocell
Power (W):		2.5 W	
Warm 2700 K (lm):	83		
Soft 3000 K (lm):	125 / 87 5CCT	80	
Bright 3500 K (lm):	93		
Neutral 4000 K (lm):	125 / 96 5CCT		
Daylight 5000 K (lm):	95		
Dim to Warm:	3000-2000K		
User Selectable CCT:	5 CCT		
Input Voltage:		120 V AC	
Triac Dimmable:	Yes		No
0-10V Dimmable:		No	
Color Rendering Index CRI:		90+	
Beam Angle:	60°		90°
Rated Life (LM70 Hours):		50,000	
Warranty (Years):		5 Year	
Certifications:		ETL	
Approved Location:		Wet IPS4	
Dimensions:		4 1/2" x 2 3/4"	
Thickness:	2"	1"	1"



4" - 5" - 6" - 7" - 12" - 15" SURFACE / J-BOX MOUNT



Model #: LBL-JB10W
Size: 5"
Trims: Round & Square, White & Black



Model #: CSC3017
Size: 6"
Trims: Round White



Model #: LED-S8W-MT
Size: 4"
Trims: Round White, Black & Nickel



Model #: CSC3025
Size: 6"
Trims: Round White



Model #: ADS5R9
Size: 5"
Trims: Round White in stock, Black & Nickel optional



Model #: ADS7R9
Size: 7"
Trims: Round White in stock, Black & Nickel optional



Model #: ADS12R9
Size: 12"
Trims: Round White in stock, Black & Nickel optional




Model #: ADS15R
Size: 15"
Trims: Round White in stock, Black & Nickel optional

Model:	LBL-JB10W	LED-S8W-MT	CSC3017	CSC3025
Short Description:	5" Round & Square Recessed J-Box Mount 5 CCT	4" Round Multi Fit J-box or Can, 3K, 4K or 5 CCT	Round Surface Mount Backlit 3K	6" Round with Motion Sensor 3K, 4K or 3 CCT
Power (W):	10 W	8 W	15 W	
Warm 2700 K (lm):	600	515		
Soft 3000 K (lm):	650	530	900	
Bright 3500 K (lm):	715	540		
Neutral 4000 K (lm):	740	560	900	
Daylight 5000 K (lm):	730	550	820	
Dim to Warm:				3 CCT
User Selectable CCT:	5 CCT			
Input Voltage:	120 V AC			
Triac Dimmable:	Yes		No	
0-10V Dimmable:	No			
Color Rendering Index CRI:	90+			
Beam Angle:	100°			
Rated Life (LM70 Hours):	50,000			
Warranty (Years):	5 Year			
Certifications:	ETL ES		ETL	
Approved Location:	Wet IP54			
Dimensions (Outside):	5 1/4"	4 7/8"	7 3/8"	8"
Thickness:	1"	1"	1"	1 3/8"

Model:	ADS5R9	ADS7R9	ADS12R9	ADS15R
Short Description:	5" Round Surface Mount Edgelit 5 CCT	7" Round Surface Mount Edgelit 3K or 4K	12" Round Surface Mount Edgelit 3K or 4K	15" Round Surface Mount Edgelit 3 CCT
Power (W):	10 W	15 W	22 W	30 W
Warm 2700 K (lm):	515			
Soft 3000 K (lm):	540	900	1400	1940
Bright 3500 K (lm):	575			
Neutral 4000 K (lm):	575	900	1400	2090
Daylight 5000 K (lm):	560			1960
Dim to Warm:				
User Selectable CCT:	5 CCT			3 CCT
Input Voltage:	120 V AC			
Triac Dimmable:	Yes			
0-10V Dimmable:	No			
Color Rendering Index CRI:	90+			
Beam Angle:	100°			
Rated Life (LM70 Hours):	50,000			
Warranty (Years):	5 Year			
Certifications:	ETL ES	ETL Energy Star		
Approved Location:	Wet IP54			
Dimensions (Outside):	5 3/8"	7 7/8"	12"	15"
Thickness:	5/8"	5/8"	1"	1"



8" - 16" - 24" - 32" LED BARS

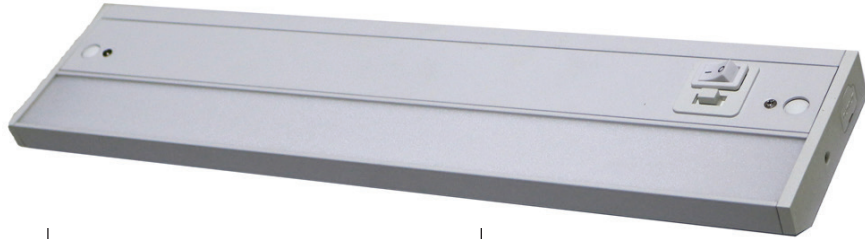

- Model #: UCL1001-8-LED
- Size: 8"
- Trims: White


- Model #: UCL1001-16-LED
- Size: 16"
- Trims: White

- Model #: UCL1001-24-LED
- Size: 24"
- Trims: White

- Model #: UCL1001-32-LED
- Size: 32"
- Trims: White

Model:	UCL1001-8-LED	UCL1001-16-LED	UCL1001-24-LED	UCL1001-32-LED
Short Description:	8" Under Cabinet Bar	16" Under Cabinet Bar	24" Under Cabinet Bar	32" Under Cabinet Bar
Power (W):	6 W	10 W	14 W	16 W
Warm 2700 K (lm):	440	880	1000	1150
Soft 3000 K (lm):	450	900	1050	1200
Bright 3500 K (lm):				
Neutral 4000 K (lm):	460	920	1100	1250
Daylight 5000 K (lm):				
Dim to Warm:				
User Selectable CCT:	3 CCT			
Input Voltage:	120V AC			
Triac Dimmable:	Yes			
0-10V Dimmable:	No			
Color Rendering Index CRI:	90+			
Beam Angle:	100°			
Rated Life (LM70 Hours):	50,000			
Warranty (Years):	5 Year			
Certifications:	ETL			
Approved Location:	Damp			
Dimensions:	8"	16"	24"	32"
Thickness:	1"			

LED STRIPS

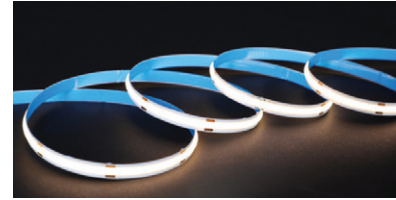

- Model #: LBL-COB-384-24V-8MM
- Size: 16 ft / 5 m



- Model #: LBL-COB-384-24V-10MM-IP65
- Size: 16 ft / 5 m



- Model #: LBL-COB-320-24V-8MM-100FT
- Size: 3 pieces of 33 ft / 10 m per pack



Model:	LBL-COB-384-24V-8MM	LBL-COB-384-24V-10MM-IP65	LBL-COB-320-24V-8MM-100FT
Short Description:	Indoor COB LED Strip 16 ft	Outdoor COB LED Strip 16 ft	Indoor COB LED Strip 3 x 33 ft
Power (W):	3 W / ft		
Warm 2700 K (lm):	290 lm / ft		
Soft 3000 K (lm):	300 lm		
Bright 3500 K (lm):			
Neutral 4000 K (lm):	330 lm / ft		330 lm / ft
Daylight 5000 K (lm):	330 lm / ft		
Dim to Warm:			
User Selectable CCT:			
Input Voltage:	24 V DC		
Triac Dimmable:	Depending on Driver		
0-10V Dimmable:			
Color Rendering Index CRI:	90+		
Beam Angle:	180°		
Rated Life (LM70 Hours):	20,000		
Warranty (Years):	3 Year		
Certifications:	ETL		
Approved Location:	Dry	Wet IP65	Dry
Roll Length:	16 ft / 5 m		3 pieces of 33 ft / 10 m
Maximum Connection Length:	16 ft / 5 m		33 ft / 10 m



DC OUTPUT DRIVERS 12W TO 96W



- Model #: HBL024-120-12/24-D
- Output: 12V/24V | 24W
- Connection Type: Hard Wired



- Model #: WLS-PD30LU-24
- Output: 12V 12W
- Connection Type: Plug-In



- Model #: LBL-DC24V30W
- Output: 24V 30W
- Connection Type: Hard Wired or Plug-In



- Model #: LBL-DC24V96W
- Output: 24V 96W
- Connection Type: Hard Wired or Plug-In

Model:	HBL024-120-12/24-D	WLS-PD30LU-24	LBL-DC24V30W	LBL-DC24V96W
Short Description:	12V/24V 24W Hard Wired Driver Dimmable	12V 12W Plug-In Driver Not Dimmable	24V 30W Hard Wired or Plug-In Driver Dimmable	24V 96W Hard Wired or Plug-In Driver Dimmable
Input Voltage (V AC):	120 V DC	120V - 240V AC	120 V DC	
Output Voltage (V DC):	12 V / 24 V	12	24	
Output Wattage (W):	24 W	12 W	30 W	96 W
Dimmability:	Triac	Not Dimmable	Triac	Triac & 0-10V
Approved Location:	Damp		WET IP67	
Rated Life (Hours):	20,000			
Warranty (Years):	3 Year			
Certifications:	ETL			cULus
Dimensions:	5" x 4" x 1 1/4"	3" x 1 1/2" x 1 1/2"	6 1/2" x 1 5/8" x 7/8"	9" x 2 1/2" x 3/4"

DC OUTPUT DRIVERS 5-IN-1 DIMMABLE 60W TO 288W



- Model #: SMT-024-060VTDHV2
- Output: 24V 60W
- Connection Type: Hard Wired



- Model #: SMT-024-096VTDHV2
- Output: 24V 96W
- Connection Type: Hard Wired



- Model #: SMT-024-192VTD52JV2
- Output: 24V 192W
- Connection Type: Hard Wired



- Model #: SMT-024-288VTD52JV2
- Output: 24V 288W
- Connection Type: Hard Wired


Model:	SMT-024-060VTDHV	SMT-024-096VTDHV	SMT-024-192VTD52JV2	SMT-024-288VTD52JV2
Short Description:	Hard Wired Drivers with Wiring Compartments			
Input Voltage (V AC):	120V - 277V AC			
Output Voltage (V DC):	24V DC			
Output Wattage (W):	60 W	96 W	192 W	288 W
Dimmability:	Triac, 0-10V, 1-10V, Potentiometer, 10V PWM			
Approved Location:	Wet			
Rated Life (Hours):	50,000			
Warranty (Years):	7 Year			
Certifications:	UL			
Dimensions:	7 3/8" x 3 1/2" x 1 5/8"	8 3/4" x 3 1/2" x 1 3/4"	11" x 4 1/4" x 1 3/4"	12" x 4 1/4" x 1 3/4"



DIMMERS & SWITCHES WALL SCONCES KINETIC DOOR BELL



Model #: ERC112

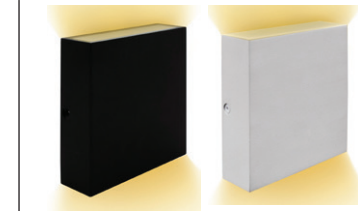

Model #: OD-5-1000L-5CCT



Model #: ERC111



Model #: EU1254




Model #: LBL-KDB-1

Model:	ERC111	ERC112	EU1254	OD-5-1000L-5CCT	LBL-KDB-1
Short Description:	Smart Dimmer	Smart Switch	Kinetic Switch	Wall Sconce	Kinetic Doorbell Wireless Batteryless
LED Load Capacity (W):	200 W	250 W	N/A	15 W	0.1 / 0.6 W
Input Voltage:	100 - 240V AC			120-277V	100 - 240V AC
Triac Dimmable:	Triac			Triac	
Other Control:	Smart Control from App			SCCT	
Warranty (Years):	3 Year			5 Year	2 Year
Certifications:	ETL, FCC			ETL	ETL, FCC
Approved Location:	Dry			Wet	Transmitter Wet /


ACCESSORIES




Flanged with Expandable Bars

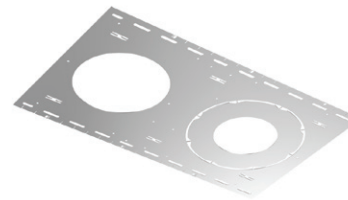

Multi-fit Plate 6" to 10" Holes for Stud Ceiling

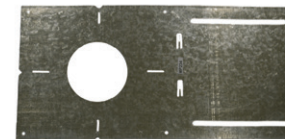


13" Long Flat Mounting Plates



13" Long Flanged Mounting Plates




26" Long Flat Mounting Plates

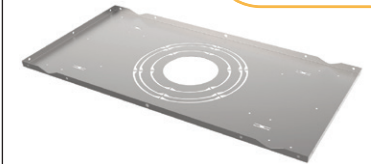

Multi-fit Plate 4" to 10" Holes for T-Bar Ceiling



Goof Rings from 3" to 10"

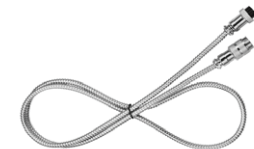

Low Voltage Extension Cables




Vapour Barriers



Emergency Driver

Lotus LED Lights is closer than you think!

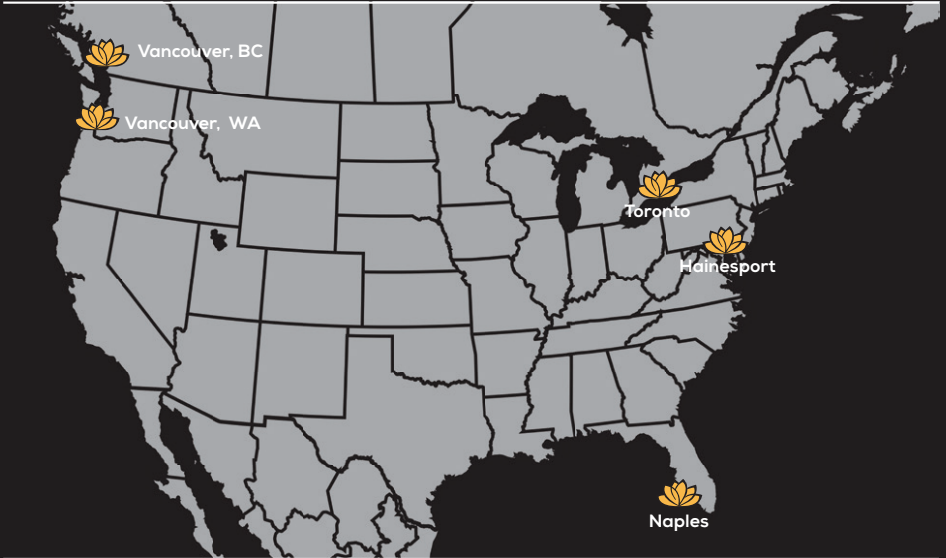

Lotus LED Lights

www.lotusledlights.com



USA: 360-200-5500

Canada: 604-538-3090

Toll Free: 1-844-24-LOTUS
(1-844-245-6887)

sales@lotusledlights.com

USA:

Lotus LED Lights
250 H Street #301
Blaine, WA 98230, USA
Warehouses: Vancouver WA,
Naples FL, Hainesport NJ

Canada:

Lotus LED Lights
702 Chester Rd, Delta BC
V3M 6J1, Canada
Warehouses: Vancouver BC,
Toronto, ON